


L	12	15	20	25
F	4	7	12	12

Full C.C.W Position Type

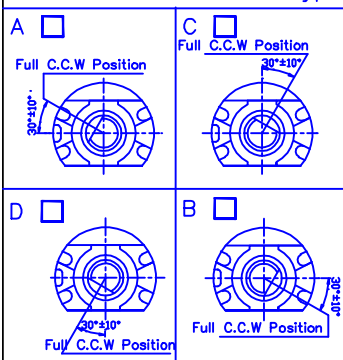

	25°	30°	32°	38°	40°	45°	50°	55°	60°	65°	70°	80°	85°	90°	100°
A	105°	112°	118°	120°	136°	145°	150°	158°	160°	180°	190°	200°	230°	240°	260°
	270°														

ANGLE		PART NO.
A	D	
108°	202°	12157-10
115°	195°	12157-11
150°	160°	12157-25

ANGLE		PART NO.
A	D	
165°	45°	12157-28
70°	175°	12157-29
25°	177°	12157-30

ANGLE		PART NO.
A	D	
165°	150°	12157-32
160°	155°	12157-35

ANGLE		PART NO.	未指定容許±尺寸之公差	
A	B		10以下	±0.3
180°	10°	12157-24	10~100	±0.5
50°	6°	12157-27	100以上	±0.8
30°	6°	12157-47	角度	±5°
碳膜有效角度公差		±3°		
成分中角度公差		±4°		
成分中阻抗誤差		R ₁ -2-R ₁ -3) ≤ ($\frac{\text{全阻值上標值}}{\text{標稱有效角度下標值}} \times 8$)		

東莞市立動達電子有限公司
DONGGUAN UMS ELECTRONIC CO.,LTD.

MTL	SPEC	DISPOSAL	UNIT	SCALE	TITLE
			MM	2 / 1	M-16K Series
			DRAWN	DESIGN	DWG NAME
			Z L		M-16KNP
DEVISION	DATE	DESIGN	2014.07.01		DWG NO.